

FFTlightweight FibreTec Profile



Highlights:

- FLW810001xx (01-40)
- Modular system
- Connected using aluminum plates
- The profiles consist of wound CFRP and aluminum deflection points
- Adaptable to OEM standards
- Weight-specific deflection and higher fatigue strength



Basic Data	
Length	150 - 6000 mm counter steps: 150 mm
Width	80 mm
Height	80 mm
Weight	Ca. 2,8 kg/m

Available lengths (mm), nominal lengths plus 19 mm allowance on left/right:			
150	300	450	600
750	900	1050	1200
1350	1500	1250	1800
1950	2100	2250	2400
2550	2700	2850	3000
3150	3300	3450	3600
3750	3900	4050	4200
4350	4500	4650	4800
4950	5100	5250	5400
5550	5700	5850	6000

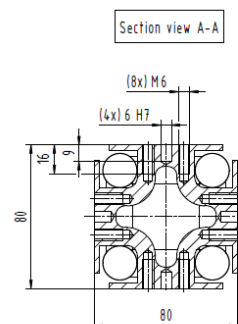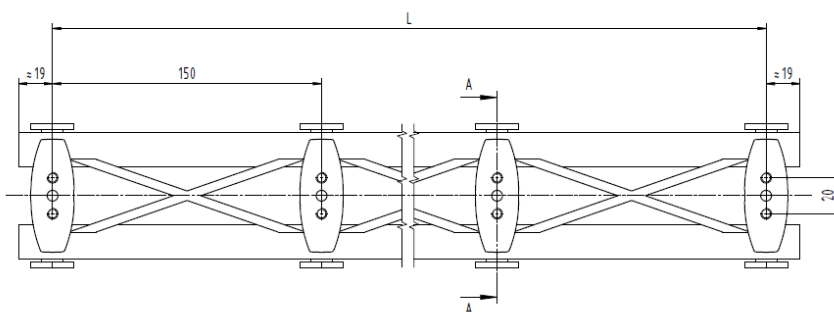

All information regarding the properties and usability of our products is provided for informational purposes only and does not constitute a guarantee of characteristics. The scope and content of our deliveries and services are determined solely by the respective contractual agreement. Technical data and illustrations are non-binding. We reserve the right to make changes at any time during technical developments.